


TAPER BUSH BOLT HUBS & ADAPTORS

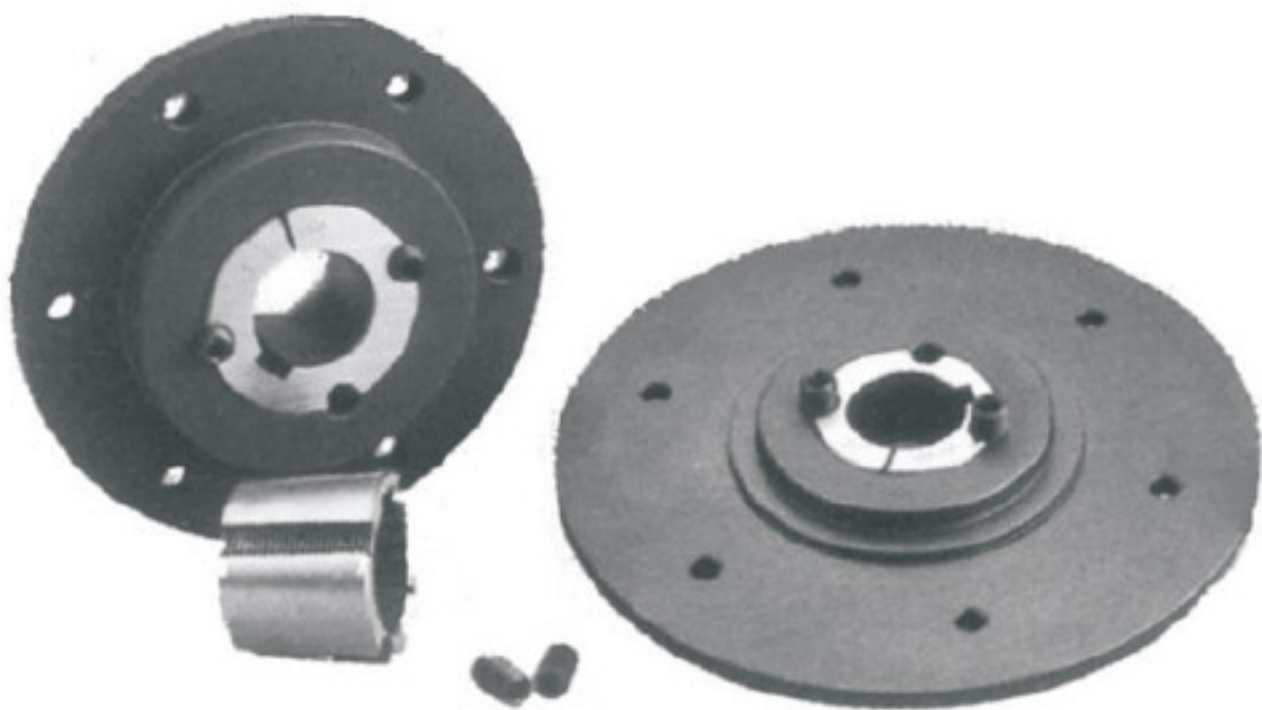


4L... Taper Bush Hubs & Adaptors

TAPER BUSH WITH BOLT HUBS

Model	Bush Size	D ₁	D ₂	D ₃ *	D ₄	D ₅
FB12	1210	120	100	80	74	80
FB16	1610	130	110	90	84	90
FB20	2012	145	125	115	99	100
FB25	2517	185	155	130	120	119
FB30	3020	220	190	165	146	147

Model	Bush Size	L ₁	L ₂	L ₃	L ₄	B
FB12	1210	25	10	6.5	2.5	M6
FB16	1610	25	10	6.5	2.5	M6
FB20	2012	32	13	8.5	2.5	M8
FB25	2517	44	20	11.5	2.5	M10
FB30	3020	50	20	11.5	2.5	M16


*Bore tolerance of D₃ +0mm/-0.05mm is recommended 6 holes equally spaced to suit B dia. bolts

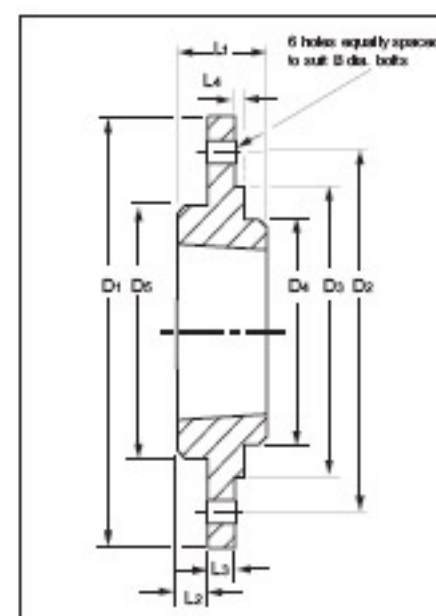

TAPER BUSH ADAPTORS

Hub Model	L ₁	D ₂	Key Section	Hub dia. D	
				Cast Iron BS1452 GG-20-25	Steel BS970Pt1 070M20
1008P	22	45	-	71	62
1008K			5 x 5	75	67
1210P	25	60	-	97	85
1210K			6 x 6	103	93
1610P	25	70	-	106	95
1610K			10 x 8	113	102
2517P	45	105	-	145	133
2517K			16 x 10	151	140
3030P	76	130	-	181	165
3030K			20 x 12	191	175
3535P	89	160	-	225	203
3535K			22 x 12	235	213
4040P	102	185	-	275	248
4040K			24 x 12	285	257

*Bore tolerance of D₃ +0.025/+0.075mm recommended
All dimensions in millimetres.

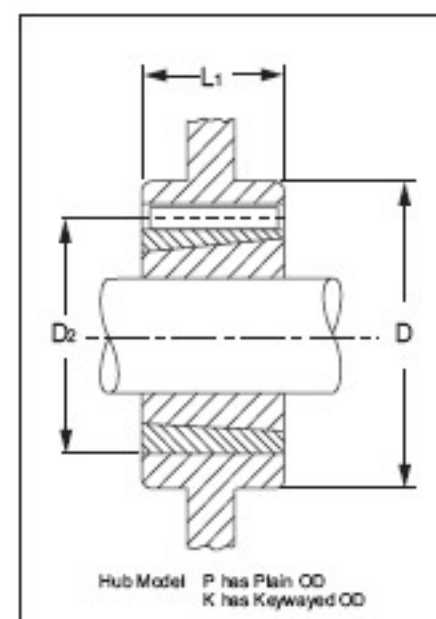

TAPER BUSH WELD HUBS

Model	Bush Size	D ₁	D ₂ *	D ₃	L ₁	L ₂	L
HW12	1210	70	65	64.5	25	9	10
HW16	1610	80	75	74.5	25	9	10
HW20	2012	95	90	89.5	32	12	12
HW25	2517	115	110	109.5	44	19	15
HW30	3020	145	140	139.5	50	20	15
HW35	3525	190	180	179.5	65	25	25
HW40	4030	200	190	189.5	76	32	30
HW45	4535	210	200	199.5	89	40	30
HW50	5040	230	220	219.5	102	40	35

